

## GTS-80/T

### Global Transmission Sleeve

#### Product Description




GTS-80 Global Transmission Sleeves are shipped pre-cut with a pre-attached closure. Bulk quantities are also available. The adhesive is protected from contamination by an inner liner.

#### Equipment List



Canusa torch, propane tank, hose & regulator; Canusa E-Primer, thickness gauge Mixing sticks, cups & applicator pads; Digital Thermometer with suitable probe, flat roller; Appropriate tools for abrasion (rasp, file, or sandpaper); Standard safety equipment (gloves, goggles, hard hat, etc.)


#### Flame Intensity & Torch Size

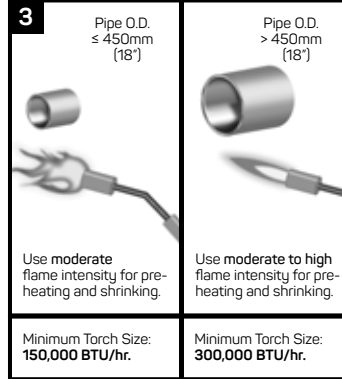

#### Surface Preparation



Ensure that the mainline coating edges are beveled to 30°. If there is the presence of oil, grease, or other surface contaminants; clean the exposed steel and adjacent pipe coating with a solvent cleanser.




Warm the joint area to 40-50°C (100-120°F) before grit blasting. Thoroughly clean the weld area with a sand or grit blaster to "near white metal" SIS Sa 2 1/2 or equivalent. Abrade the mainline coating adjacent to the weld area to a distance 50 mm (2") beyond the sleeve width.



Wipe clean or air blast the steel and coated areas to remove foreign materials.

#### Epoxy Primer



Follow the Preparation, Mixing and Application instructions provided with the supplied Canusa Epoxy Pack. For bulk quantities: mix the primer cure with the primer base (4 parts base to 1 part cure by volume). Stir for a minimum of 30 seconds to assure uniform mixture.

#### Epoxy Primer Application



Apply mixed epoxy to a minimum uniform thickness of 4 mils on all exposed bare metal plus 10 mm (0.5") onto the adjacent pipe coating.

#### Pre-Heat



Preheat the epoxy to a temperature of 110°C and the abraded mainline coating to be covered by the sleeve to a minimum of 100°C with the appropriate propane torch, induction heating or infrared heating equipment. Do not use an intense flame on the mainline coating. If a film develops on the mainline coating because of preheat, use a surface abrasion tool to remove it.


#### Sleeve Installation



Ensure that the epoxy primer is dry to the touch prior to sleeve installation.




Partially remove the release liner and gently heat the underlap approximately 150 mm (6") from the edge.

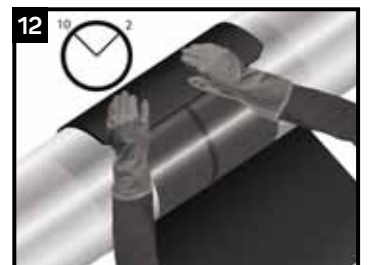

Centre the sleeve over the joint so that the sleeve overlaps between the 10 and 2 o'clock positions. Press the underlap firmly into place. Remove the remaining release liner.


## Sleeve Installation Cont'd




Wrap the sleeve loosely around the pipe, ensuring the appropriate overlap. Gently heat the backing of the underlap and the adhesive side of the closure.



Press the closure firmly into place.




Gently heat the closure and pat it down with a gloved hand. Repeating this procedure, move from one side to the other. Smooth any wrinkles by gently working them outward from the centre of the closure with a roller.




Pipe O.D.  
 $\leq 450\text{mm}$  (18")  
 1 torch/induction or infrared heater  
 $> 450\text{mm}$  (18")  
 2 torches/1 induction or infrared heater


Using the appropriate sized torch, begin at the centre of the sleeve and heat circumferentially around the pipe. Use broad strokes. If utilizing two torches, operators should work on opposite sides of pipe.



Continue heating from the centre toward one end of the sleeve until recovery is complete. In a similar manner, heat and shrink the remaining side.



Shrinking has been completed when the adhesive begins to ooze at the sleeve edges all around the circumference. Finish shrinking the sleeve with long horizontal strokes over the entire surface to ensure a uniform bond.



While the sleeve is still hot and soft, use a hand roller to gently roll the sleeve surface and push any trapped air up and out of the sleeve, as shown above. Continue the procedure by also firmly rolling the closure with long horizontal strokes from the weld outwards.



Visually inspect the installed sleeve for the following:

- Sleeve is in full contact with the steel joint.
- Adhesive flows beyond both sleeve edges.
- No cracks or holes in sleeve backing.

## Backfilling Guidelines

After shrinking is complete, allow the sleeve to cool for 2 hours prior to lowering and backfilling. To prevent damage to the sleeve, use selected backfill material, (no sharp stones or large particles) otherwise an extruded polyethylene mesh or other suitable shield should be used.

## Storage & Safety Guidelines

To ensure maximum performance, store Canusa products in a dry, ventilated area. Keep products sealed in original cartons and avoid exposure to direct sunlight, rain, snow, dust or other adverse environmental elements. Avoid prolonged storage at temperatures above 35°C (95°F) or below -20°C (-4°F). Product installation should be done in accordance with local health and safety regulations.

These installation instructions are intended as a guide for standard products. Consult your Canusa representative for specific projects or unique applications.

### Canusa-CPS A division of Shawcor Ltd.

#### Head Office

25 Bethridge Road  
 Toronto, ON, Canada M9W 1M7  
 Tel: +1 416 743 7111  
 Fax: +1 416 743 5927

#### Canada

Dome Tower St. 2200,  
 333-7th Avenue SW  
 Calgary, AB, Canada T2P 2Z1  
 Tel: +1 403 218 8207  
 Fax: +1 403 264 3649

#### Americas

5875 N. Sam Houston Pkwy W,  
 Suite 200  
 Houston, TX, USA 77086  
 Tel: +1 281 886 2350  
 Fax: +1 281 886 2353

#### Middle East

Plot # 37-WR43, Sector no.: ICAD III  
 Musaffah South, PO Box 2621  
 Abu Dhabi, The United Arab Emirates  
 Tel: +971 2 204 9800

#### Europe, Africa & Russia

Dellaertweg 9-E, Gebouw  
 "Le Carrefour"  
 2316 WZ Leiden,  
 The Netherlands (NL)  
 Tel: +31 71 80 802 70  
 Fax: +31 71 80 802 71

#### Asia-Pacific

101 Thomson Road,  
 #11-03 United Square  
 307591 Singapore  
 Tel: +65 6749 8918  
 Fax: +65 6749 8919

### Quality Management system registered to ISO 9001

Canusa warrants that the product conforms to its chemical and physical description and is appropriate for the use stated on the installation guide when used in compliance with Canusa's written instructions. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. Canusa's liability is stated in the standard terms and conditions of sale. Canusa makes no other warranty either expressed or implied. All information contained in this installation guide is to be used as a guide and is subject to change without notice. This installation guide supersedes all previous installation guides on this product. E&OE

Part No. 99060-107  
 IG\_GTS-80/T\_rev014

## Epoxy Usage

300 mm / 12" cutback and  
 0.15 mm / 0.006" epoxy thickness

Pipe Diameter		Quantity Required	
mm	in	base (ml)	cure (ml)
115	4½	16	4
170	6.6	24	6
230	8.6	32	8
280	10¾	40	10
315	12¾	44	11
355	14	52	13
400	16	56	14
450	18	64	16
500	20	72	18
610	24	88	22
660	26	96	24
760	30	108	27
915	36	132	33
1060	42	152	38
1220	48	172	43
1420	56	200	50
1520	60	216	54

Epoxy required for 300 mm / 12" cutback.

For other cutbacks, divide by 12 and multiply by new cutback in inches.

#### Example:

200 mm (8") cutback on 610 mm diameter pipe

base:  $88\text{ ml} \times 8/12 = 60\text{ ml}$  base

cure:  $22\text{ ml} \times 8/12 = 15\text{ ml}$  cure