

WrapidShield PE

Impact Protection for Pipeline Coatings

Canusa-CPS' WrapidShield PE is an advanced extruded and blown polyethylene Rock Shield system engineered to provide high impact resistance and compressive strength when used as a protective layer over top of anti-corrosion coatings. The material resists impact damage due to rocky backfill materials or offshore lay barge rollers. WrapidShield PE helps to cushion any impact during the construction process, is more economical, lighter weight and easier to install than alternate methods of protection.



High Performance System

- Manufactured from high density polyethylene with a blowing agent to produce a strong but lightweight cellular structure
- Multi-layer crisscross extrusion resulting in tight rhomboidal openings
- Open mesh allows water to flow around the pipe and will not shield cathodic protection, even when applied in multiple layers
- Chemically inert and will not rot
- Supplied as bulk rolls with widths suitable for wrapping up to a 28" diameter pipe using long lengths of material
- Plastic strapping or filament tape may be supplied as per project or customer requirements

Rapid and Reliable Installation

- Installed along the pipe or around a field joint as per the diagrams on the back page
- Light weight rolls are easy to handle in the field
- Light weight system yet provides superior impact protection
- Secured by means of circumferential strapping tapes or similar
- Supplied in bulk roll widths ranging up to 2.4 m (7.8') or pre-cut sheets

Applications



All Pipeline Coatings



Offshore Pipelines



Onshore Pipelines



All Pipe Sizes



WrapidShield PE


Impact Protection for Pipeline Coatings

Property	Test Method	Typical Values
Aperture Size	-	4 mm x 4 mm
Cathodic Protection	-	No Inhibiting Effect
Compressive Strength	ASTM D1621 (mod)	> 0.6 Mpa @ 50% reduction
Elongation at Max Strength	ASTM D4595	MD: > 110% TD: > 130%
Impact Resistance	ASTM G13 (mod)	No Failure at 6" Rock
Impact Strength	ASTM G14	45 J
Melt Temperature	ASTM E794	> 100°C
Tear Resistance	ASTM D624	MD: > 32 N/cm TD: > 40 N/cm
Tensile Strength	ASTM D4595	> 75 N/cm
Thickness	-	10 - 11 mm
Weight	-	1550 - 1850 g/m ²

Latitudinal or Circumferential Wrapping



Longitudinally wrap custom width rolls for pipelines up to 28" in diameter or...

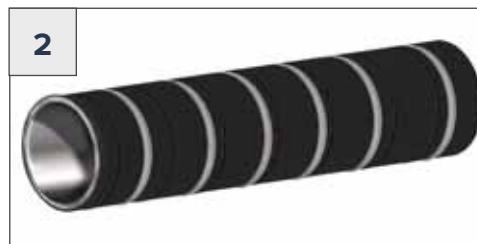

... spirally wrap from bulk rolls for larger diameter pipelines.



Cut to length for larger diameter pipelines or field joints by circumferentially wrapping cut sheets from bulk rolls.



4 Strap the rolls or the pre-cut sheets around the pipe with filament tape or appropriate non-metallic strapping.

5 Recommended product overlap is at the bottom of the pipe or shiplapped along the pipeline to avoid separation during backfill.

Since 1967, Canusa-CPS has been a leading developer and manufacturer of specialty pipeline coatings for the sealing and corrosion protection of pipeline joints and other substrates. Canusa-CPS high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate many specific project applications.

The product information shown here is intended as a guide for standard products.

Consult your Canusa representative for specific projects or unique applications.



Canusa-CPS
A division of Shawcor Ltd.

Head Office

25 Bethridge Road
Toronto, ON, Canada M9W 1M7
Tel: +1 416 743 7111
Fax: +1 416 743 5927

Canada

Dome Tower St. 2200, 333-7th Avenue SW
Calgary, AB, Canada T2P 2Z1
Tel: +1 403 218 8207
Fax: +1 403 264 3649

Americas

5875 N. Sam Houston Pkwy W., Suite 200
Houston, TX, USA 77086
Tel: +1 281 886 2350
Fax: +1 281 886 2353

Middle East

Plot # 37-WR43, Sector no.: ICAD III
Musaffah South, PO Box 2621
Abu Dhabi, The United Arab Emirates
Tel: +971 2 204 9800

Europe, Africa & Russia

Dellaertweg 9-E, Gebouw "Le Carrefour"
2316 WZ Leiden, The Netherlands (NL)
Tel: +31 71 80 802 70
Fax: +31 71 80 802 71

Asia-Pacific

101 Thomson Road, #11-03 United Square
307591 Singapore
Tel: +65 6749 8918
Fax: +65 6749 8919

Quality Management system
registered to ISO 9001

Canusa warrants that the product conforms to its chemical and physical description and is appropriate for the use stated on the product data sheet when used in compliance with Canusa's written instructions. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. Canusa's liability is stated in the standard terms and conditions of sale. Canusa makes no other warranty either expressed or implied. All information contained in this data sheet is to be used as a guide and is subject to change without notice. This data sheet supersedes all previous data sheets on this product. E&OE

PDS_WrapidShield PE_rev024